

VERSION 13.2.0.1.0

PURE STORAGE FLASHARRAY PLUG-IN

FOR ORACLE ENTERPRISE MANAGER

TABLE OF CONTENTS

INTRODUCTION	3
PREREQUISITES	3
Oracle Environment Prerequisites	3
Pure Environment Prerequisites	3
INSTALLING AND CONFIGURING THE PURE STORAGE FLASHARRAY PLUG-IN	4
Installation Overview	4
Download the Plug-in	4
Import the Plug-in OPAR	4
Deploy the Plug-in on the Oracle Management Server (OMS)	5
Deploy the Plug-in on the Oracle Management Agent (OMA)	6
Verify Plug-in Deployment	7
Create the Pure Storage FlashArray Target	8
USING THE PLUG-IN	10
Home Page	10
Volumes Page	12
Add Space	13
CAT for Oracle	18
ASM Reclamation Utility	20
UNDEPLOY THE PLUG-IN	23
Delete the Pure Storage FlashArray Target	23
Undeploy the Plug-in on the Oracle Management Agent (OMA)	24
Undeploy the Plug-in on the Oracle Management Server (OMS)	25
TROUBLESHOOTING	27
Add Space Functionality	27
CAT for Oracle Functionality	27

INTRODUCTION

Pure Storage® provides simple, comprehensive integration with the Oracle® Enterprise Manager platform via the Pure Storage REST API and the FlashArray Plug-in for OEM. This guide provides an overview of the plug-in's integration with OEM and best practices for its use.

PREREQUISITES

Oracle Environment Prerequisites

The following sections describe the supported software versions and operating systems for the various components of the Oracle Enterprise Manager system.

ORACLE ENTERPRISE MANAGER

The plug-in supports the following Oracle Enterprise Manager versions:

- Oracle Enterprise Manager Cloud Control 13c R2 (13.2.0.1.0)

The HTML5/JS framework was released as a patch (#25453518) for the 13.2 release.

DO NOT INSTALL Pure Storage Array plugin v13.2.0.1.0 unless you are running OEM 13c with patch 25453518 already installed.

ORACLE MANAGEMENT SERVER (OMS)

The plug-in is supported for all Oracle Management Server platforms.

ORACLE MANAGEMENT AGENT (OMA)

The plug-in is supported for the following Oracle Management Agent platforms:

- Linux x86-64
- Microsoft Windows x64 (64-bit)
- Oracle Solaris on SPARC (64-bit)

Pure Environment Prerequisites

The plug-in uses the Pure Storage REST API for data collection from the Pure Storage array. The following versions of the REST API are supported:

- Pure Storage REST API 1.4 or later

INSTALLING AND CONFIGURING THE PURE STORAGE FLASHARRAY PLUG-IN

Installation Overview

This chapter describes installation and configuration steps in detail.

Ensure that the OEM environment is properly setup for plug-in deployment before beginning. The **emcli** utility must be configured and working locally on the Oracle Management Server to successfully complete the installation.

Download the Plug-in

To download the plug-in, go to the Oracle Extensibility Exchange website (<http://www.oracle.com/goto/emextensibility>) and search for the Pure Storage FlashArray plugin. That website will redirect to the VLSS download page (<http://www.vlss-llc.com/pure-storage-oem/>), where the plug-in zip file can be downloaded. The zip file contains the OPAR as well as a PDF copy of this document.

Transfer the OPAR to any accessible location on the Oracle Management Server host.

Import the Plug-in OPAR

After the OPAR is located on the management server, it needs to be imported into the OEM environment. Use the **emcli** utility to import the OPAR.

Login to the OMS from the command line:

```
$ emcli login -username=sysman
```

Type the following command:

```
$ emcli import_update -file="<path to downloaded *.opar file>" -omslocal
```

The **-omslocal** flag indicates that the file is located on the same host as the Oracle Management Server. Please see the Oracle documentation for importing the OPAR from a remote host.

For example:

```
$ emcli import_update -file=/home/oracle/Downloads/ 13.2.0.1.0_vlss.pure.xvp1_2000_0.opar -omslocal
```

```
Processing update: Plug-in - Pure Storage Flash Array. Operation completed successfully. Update has been
uploaded to Enterprise Manager. Please use the Self Update Home to manage this update.
```


Deploy the Plug-in on the Oracle Management Server (OMS)

After the OPAR is imported, it must be deployed on the OMS. There are two methods to deploy to the OMS:

THROUGH THE OEM CONSOLE

To deploy the plug-in through the console:

1. From the **Setup** menu, select **Extensibility** and then **Plug-ins**.
2. From the **Plug-ins** page, select the **Pure Storage FlashArray** plug-in. Then select **Deploy On** and choose **Management Servers**.

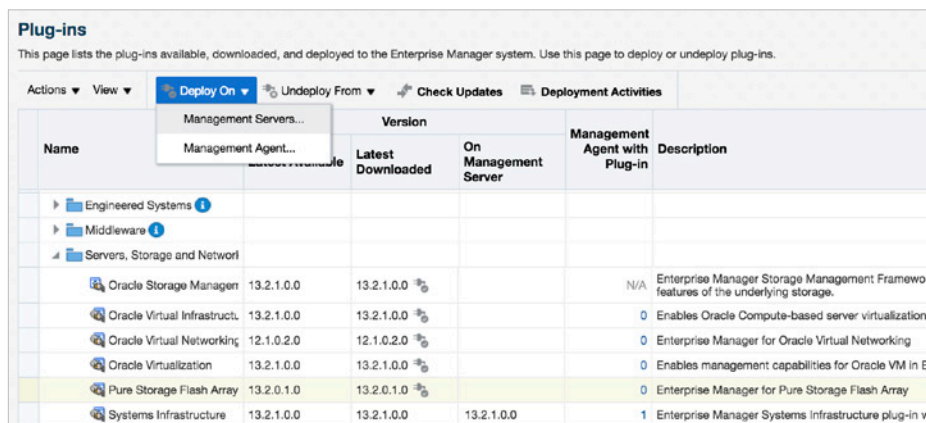

Plug-ins					
This page lists the plug-ins available, downloaded, and deployed to the Enterprise Manager system. Use this page to deploy or undeploy plug-ins.					
Actions View Deploy On Undeploy From Check Updates Deployment Activities					
Name	Version	Latest Downloaded	On Management Server	Management Agent with Plug-in	Description
Engineered Systems					
Middleware					
Servers, Storage and Network					
Oracle Storage Manager	13.2.1.0.0	13.2.1.0.0		N/A	Enterprise Manager Storage Management Framework features of the underlying storage.
Oracle Virtual Infrastruct.	13.2.1.0.0	13.2.1.0.0		0	Enables Oracle Compute-based server virtualization
Oracle Virtual Networking	12.1.0.2.0	12.1.0.2.0		0	Enterprise Manager for Oracle Virtual Networking
Oracle Virtualization	13.2.1.0.0	13.2.1.0.0		0	Enables management capabilities for Oracle VM in E
Pure Storage Flash Array	13.2.0.1.0	13.2.0.1.0		0	Enterprise Manager for Pure Storage Flash Array
Systems Infrastructure	13.2.1.0.0	13.2.1.0.0	13.2.1.0.0	1	Enterprise Manager Systems Infrastructure plug-in w

FIGURE 1. Deploying the plug-in on OMS

3. In the **Deploy Plug-in on Management Servers: Plug-ins** page, click **Next**.
4. In the **Deploy Plug-in on Management Servers: Pre-requisite Checks** page, verify that the checks were successfully completed and click **Next**.
5. In the **Deploy Plug-in on Management Servers: Repository** page, enter the SYS credentials for the repository or select existing credentials and click **Next**.
6. In the **Deploy Plug-in on Management Servers: Review** page, click **Deploy** to deploy the plug-in on the OMS.
7. In the **Deploy Plug-in on Management Servers: Confirmation** page, click **Show Status** to view the steps of the deployment.
8. In the **Deployment Activities** page, verify that the deployment was successful with a green checkmark in the **Status** column.

THROUGH THE EMCLI UTILITY

1. Type the following command:

```
$ emcli deploy_plugin_on_server -sys_password=<Repository SYS password>
-plugin=vlss.pure.xvp1:13.2.0.1.0
```

2. The deploy will run in the background after the following output:

```
Performing pre-requisites check... This will take a while.
Prerequisites check succeeded
Deployment of plug-in on the management servers is in progress
Use "emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1" to track the
plug-in deployment status.
```

3. Verify the deployment is successful by running the status command:

```
$ emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1
```

Deploy the Plug-in on the Oracle Management Agent (OMA)


Now the plug-in must be deployed on at least one OMA which can connect to the Pure Storage REST API.

Again, there are two methods of deploying to an OMA:

THROUGH THE OEM CONSOLE

To deploy the plug-in through the console:

1. From the **Setup** menu, select **Extensibility** and then **Plug-ins**.
2. From the **Plug-ins** page, select the **Pure Storage FlashArray** plug-in. Then select **Deploy On** and choose **Management Agent**.

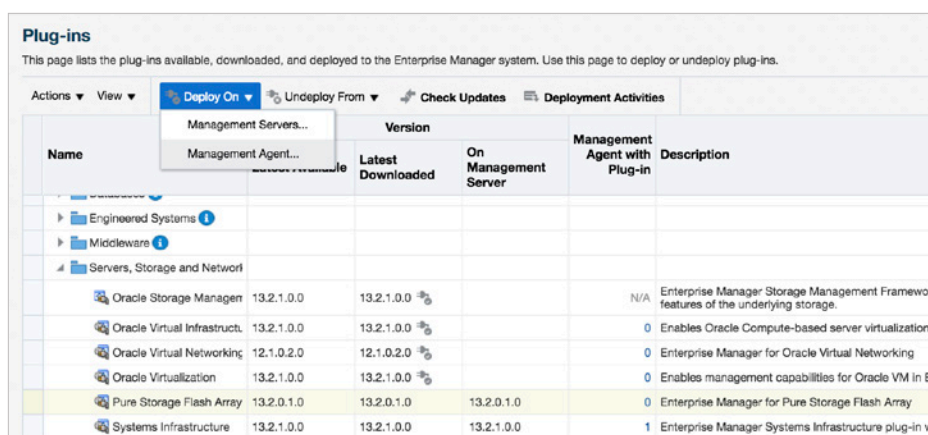

Plug-ins					
This page lists the plug-ins available, downloaded, and deployed to the Enterprise Manager system. Use this page to deploy or undeploy plug-ins.					
Actions View Deploy On Undeploy From Check Updates Deployment Activities					
Name	Version	Latest Downloaded	On Management Server	Management Agent with Plug-in	Description
Engineered Systems					
Middleware					
Servers, Storage and Network					
Oracle Storage Managen	13.2.1.0.0	13.2.1.0.0		N/A	Enterprise Manager Storage Management Framework features of the underlying storage.
Oracle Virtual Infrastruct.	13.2.1.0.0	13.2.1.0.0		0	Enables Oracle Compute-based server virtualization
Oracle Virtual Networking	12.1.0.2.0	12.1.0.2.0		0	Enterprise Manager for Oracle Virtual Networking
Oracle Virtualization	13.2.1.0.0	13.2.1.0.0		0	Enables management capabilities for Oracle VM in E
Pure Storage Flash Array	13.2.0.1.0	13.2.0.1.0	13.2.0.1.0	0	Enterprise Manager for Pure Storage Flash Array
Systems Infrastructure	13.2.1.0.0	13.2.1.0.0	13.2.1.0.0	1	Enterprise Manager Systems Infrastructure plug-in v

FIGURE 2. Deploying the plug-in on OMA

3. In the **Deploy Plug-in on Management Agent** page, click **Continue**.

4. In the **Deploy Plug-in on Management Agent: Select Management Agent** page, select an agent for deployment and click **Continue**.
5. In the **Deploy Plug-in on Management Agent: Pre-requisite Checks** page, verify that the checks were successfully completed and click **Next**.
6. In the **Deploy Plug-in on Management Agent: Review** page, click **Deploy** to deploy the plug-in on the OMA.
7. In the **Deploy Plug-in on Management Agent: Confirmation** page, click **Show Status** to view the steps of the deployment.
8. In the **Deployment Activities** page, verify that the deployment was successful with a green checkmark in the **Status** column.

THROUGH THE EMCLI UTILITY

1. Type the following command:


```
$ emcli deploy_plugin_on_agent -agent_names="<Hostname of agent>:<Port>"
    -plugin=vlss.pure.xvp1:13.2.0.1.0
```
2. The deploy will run in the background after the following output:


```
Performing pre-requisites check... This will take a while.
Prerequisites check succeeded
Deployment of plug-in on the management agent is in progress
Use "emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1" to track
the plug-in deployment status.
```
3. Verify the deployment is successful by running the status command:


```
$ emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1
```

Verify Plug-in Deployment

To verify that the plug-in deployment was successful, check the Extensibility page:

1. From the **Setup** menu, select **Extensibility** and then **Plug-ins**.
2. From the Plug-ins page, select the **Pure Storage FlashArray** plug-in. Verify that the **On Management Server** column is populated and that the **Management Agent with Plug-in** column is greater than zero.

Plug-ins

This page lists the plug-ins available, downloaded, and deployed to the Enterprise Manager system. Use this page to deploy or undeploy plug-ins.

Actions ▾ View ▾ Deploy On ▾ Undeploy From ▾ Check Updates Deployment Activities

Name	Version			Management Agent with Plug-in	Description
	Latest Available	Latest Downloaded	On Management Server		
Engineered Systems					
Middleware					
Servers, Storage and Network					
Oracle Storage Management	13.2.1.0.0	13.2.1.0.0		N/A	Enterprise Manager Storage Management Framework features of the underlying storage.
Oracle Virtual Infrastructure	13.2.1.0.0	13.2.1.0.0		0	Enables Oracle Compute-based server virtualization
Oracle Virtual Networking	12.1.0.2.0	12.1.0.2.0		0	Enterprise Manager for Oracle Virtual Networking
Oracle Virtualization	13.2.1.0.0	13.2.1.0.0		0	Enables management capabilities for Oracle VM in E
Pure Storage Flash Array	13.2.0.1.0	13.2.0.1.0	13.2.0.1.0	1	Enterprise Manager for Pure Storage Flash Array
Systems Infrastructure	13.2.1.0.0	13.2.1.0.0	13.2.1.0.0	1	Enterprise Manager Systems Infrastructure plug-in v

FIGURE 3. Verify plug-in deployment

Create the Pure Storage FlashArray Target

The Pure Storage FlashArray target is the only target needed to monitor the storage system. It provides a dashboard for monitoring the system details, capacity, performance and historical metrics of the array.

Again, there are two methods of creating the Pure Storage FlashArray target:

THROUGH THE OEM CONSOLE

1. From the **Setup** menu, select **Add Target** and then **Add Targets Manually**

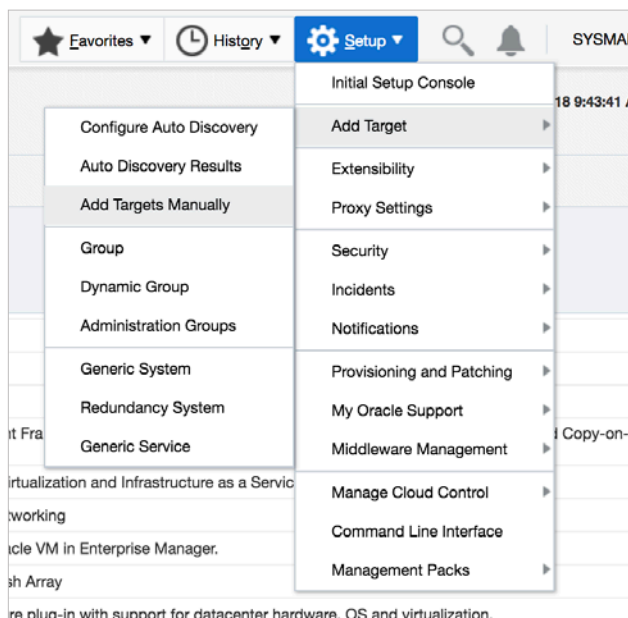


FIGURE 4. Add Target

2. Select **Add Targets Declaratively**.

3. Select **Pure Storage FlashArray** from the drop down and select a Monitoring Agent that has the Pure Storage Plug-in deployed on it. Then click **Add Manually...**
4. On the **Add: Pure Storage FlashArray** page, enter a **Target Name**. Then enter an **API Token** that has at least read privileges through the REST API. Finally, enter **Array Hostname / IP Address** for one of the virtual IPs on the array. Then click **OK**.

Figure 5. Add: Pure Storage FlashArray

5. The **Add Target** popup should appear and shortly thereafter a confirmation message that the **Add Target – Completed Successfully**.

THROUGH THE EMCLI UTILITY

1. Type the following command:

```
$ emcli add_target -name="<Target Name>" -type="pure_flash_array" -host="<Host Name>"
-properties="ARRAY_HOME:<IP or Hostname for the Pure Storage Array>;API_TOKEN:<API Token>"
```
2. The deploy will run in the background after the following output:

```
Target "<Target Name>:pure_flash_array" added successfully
```

USING THE PLUG-IN

Home Page

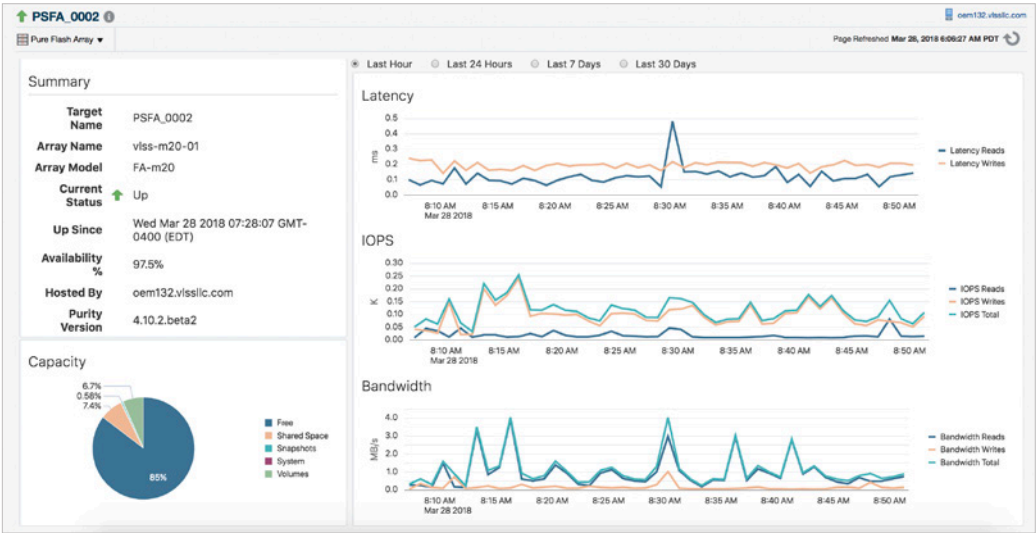


FIGURE 6. Home page

The Pure Storage FlashArray home page is a single-pane dashboard into the array. It contains the following sections:

- 1. **The Summary pane** – displays the relevant system information of the array, including array name, array model, uptime, and Purity version.

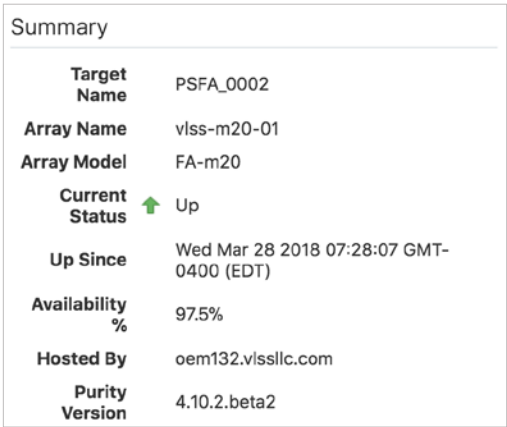


FIGURE 7. Summary pane

2. **The Capacity pane** – displays the current usage of the storage array, including volumes, shared space, snapshots, system, and free space.

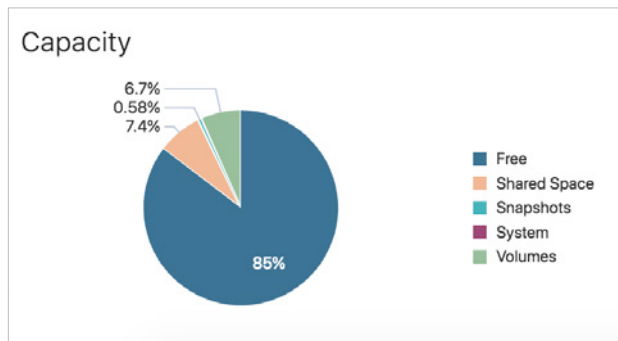


FIGURE 8. Capacity pane

3. **The Performance pane** – displays read and write latency; read, write, and total IOPS; and read, write, and total bandwidth of the array for the past hour in milliseconds. The time period radio button at the top allows for changing the time domain between the last hour, the last day, the last week, and the last month.

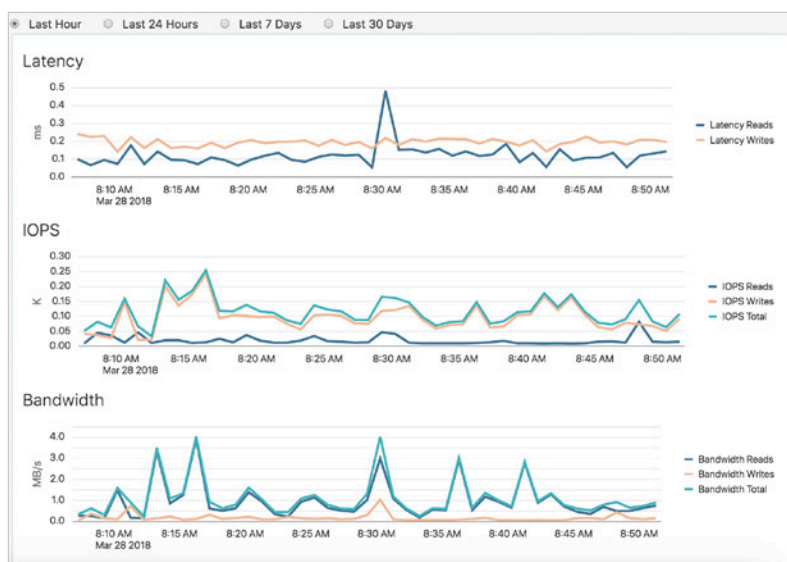


FIGURE 9. Performance pane

Volumes Page

Navigate to the **Volumes** page from the FlashArray menu.

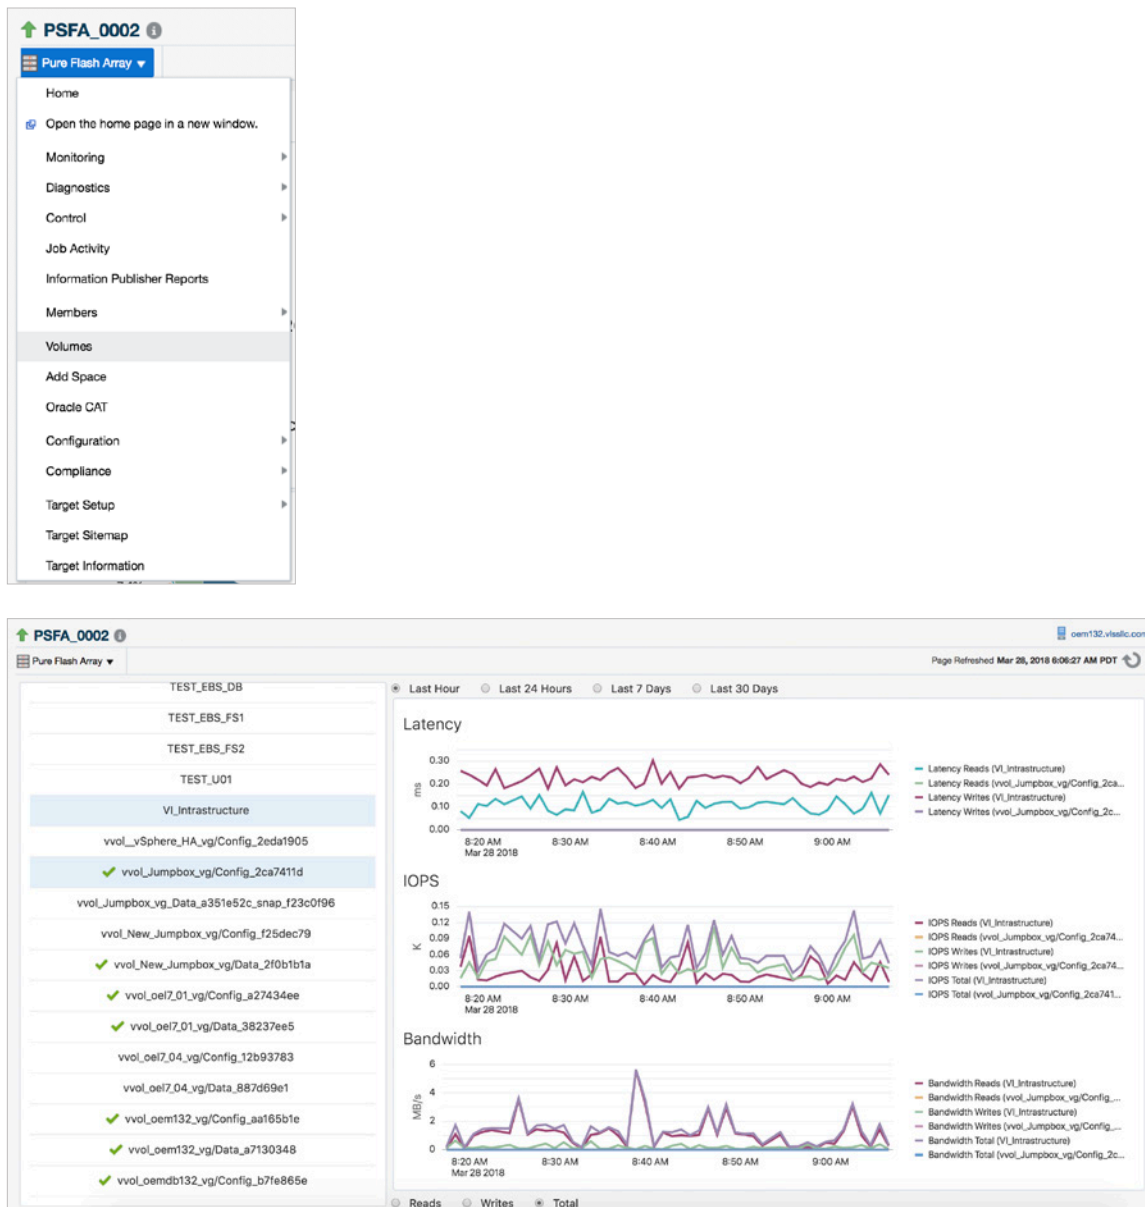


FIGURE 10. Navigating to the Volumes page

From there the volume information should be shown. All volumes are on the left. A green check indicates snapshots. The search box should restrict results. "Include Inactive" shows volumes that no longer exist, and time and read / write / total radio buttons should work on selected volumes, which should be multiselect enabled.

Add Space

The Add Space functionality makes system level changes to the plug-in hosts. It generally requires root access to do so. Ensure that you are aware of the implications of the Add Space functionality.

Navigate to the **Add Space** page from the FlashArray menu.

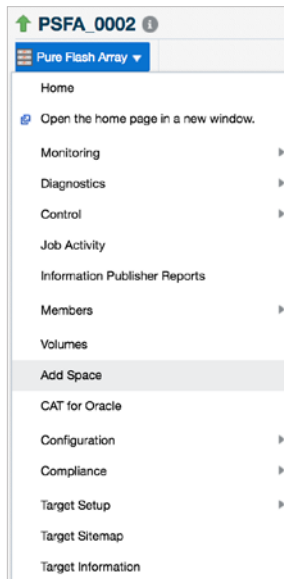


FIGURE 11. Add Space page

From the **Add Space** page, there are three different options for adding space via the plug-in: **Add Space to LVM**, **Add Space to ASM**, and **Add Space to ZFS**.

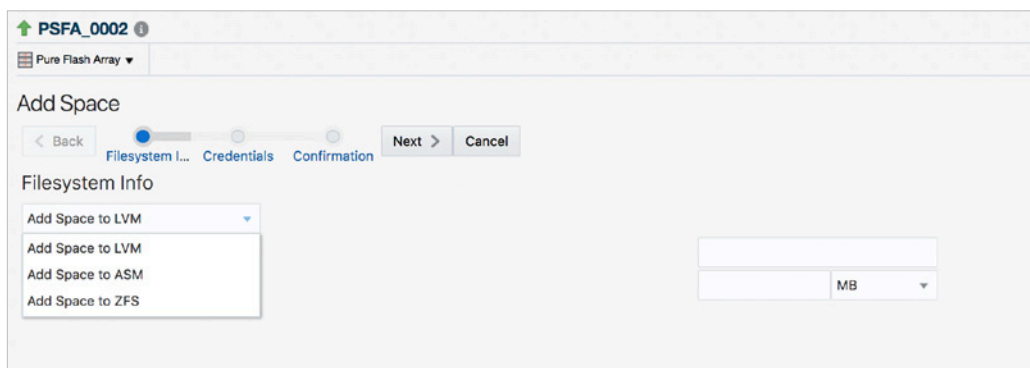


FIGURE 12. Add Space – Select Type

ADD SPACE TO LVM

The **Add Space to LVM** functionality will create a new Pure Storage volume, attach the volume to a host, and extend the specified logical volume to the new Pure Storage volume.

Prerequisites:

1. The plug-in is only supported on Oracle Linux, RedHat Linux and CentOS versions 6 and 7.
2. The plug-in hostname, the actual hostname, and the hostname in Pure Storage **MUST** be the same for the process to succeed.

From the **Add Space to LVM** page, enter the name of the logical volume to extend, enter the size of the new volume, and select the size type (MB, GB, TB) from the drop down.

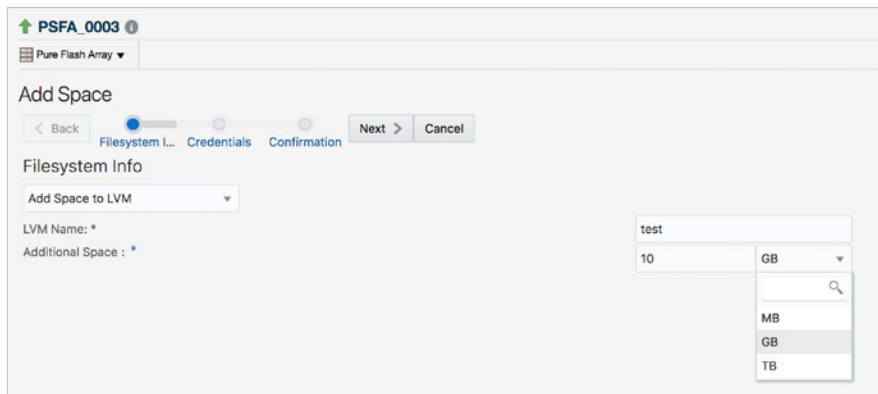


FIGURE 13. Add Space to LVM - Filesystem Info

Click **Next**. Select or enter credentials to execute the process.

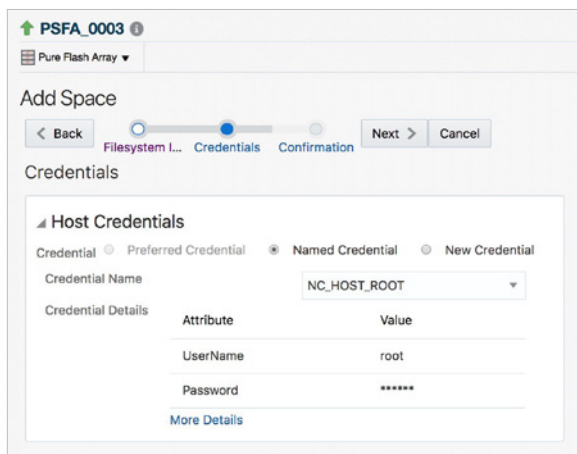


FIGURE 14. Add Space to LVM – Credentials

Click **Next**.

FIGURE 15. Add Space to LVM – Finish

Click **Finish**. The Add Space to LVM process will execute and a result message will be displayed.

ADD SPACE TO ASM

The **Add Space to ASM** functionality will create a new Pure Storage volume, attach the volume to a host, and extend the specified ASM disk group to the new Pure Storage volume.

Prerequisites:

1. Oracle ASM must be configured with **oracleasm**. udev setups are not supported.
2. The plug-in hostname, the actual hostname, and the hostname in Pure Storage **MUST** be the same for the process to succeed.

From the **Add Space to ASM** page, enter the name of the ASM disk group to extend, enter the size of the new volume, and select the size type (MB, GB, TB) from the drop down. In this scenario, the Oracle Home for the ASM instance, the ASM SID, and the user that owns the ASM instance need to be specified as well.

FIGURE 16. Add Space to ASM – ASM Info

Click **Next**. Select or enter credentials to execute the process.

PSFA_0002

Pure Flash Array

Add Space

< Back Filesystem I... Credentials Confirmation Next > Cancel

Credentials

Host Credentials

Credential ☐ Preferred Credential ☒ Named Credential ☐ New Credential

Credential Name: NC_HOST_ROOT

Attribute	Value
UserName	root
Password	*****

[More Details](#)

FIGURE 17. Add Space to ASM – Credentials

Click **Next**.

PSFA_0002

Pure Flash Array

Add Space

< Back Filesystem I... Credentials Confirmation Next > Finish

Confirmation

Filesystem Info	Credential Info
Filesystem Name: DATA Filesystem Size: 15GB	Host Cred Set Name: NC_HOST_ROOT

FIGURE 18. Add Space to ASM – Finish

Click **Finish**. The Add Space to ASM process will execute and a result message will be displayed.

ADD SPACE TO ZFS

The **Add Space to ZFS** functionality will create a new Pure Storage volume, attach the volume to a host, and extend the specified zpool to the new Pure Storage volume.

Prerequisites:

1. The is only supported on Solaris 10 and 11.
2. The plug-in hostname, the actual hostname, and the hostname in Pure Storage **MUST** be the same for the process to succeed.

From the **Add Space to ZFS** page, enter the name of the zpool to extend, enter the size of the new volume, and select the size type (MB, GB, TB) from the drop down.

PSFA_ZFS

Pure Flash Array

Add Space

Progress: Back | **Filesystem Info** | Credentials | Confirmation | Next > | Cancel

Filesystem Info

Add Space to ZFS: ▼

ZFS Storage Pool Name: * u01

Additional Space: * 10 GB ▼

FIGURE 19. Add Space to ZFS – Filesystem Info

Click **Next**. Select or enter credentials to execute the process.

PSFA_ZFS

Pure Flash Array

Add Space

Progress: Back | Filesystem Info | **Credentials** | Confirmation | Next > | Cancel

Credentials

Host Credentials

Credential: ☐ Preferred Credential ☒ Named Credential ☐ New Credential

Credential Name: NC_HOST_ROOT_SPARC ▼

Attribute	Value
UserName	root
Password	*****

[More Details](#)

FIGURE 20. Add Space to ZFS – Credentials

Click **Next**.

PSFA_ZFS

Pure Flash Array

Add Space

Progress: Back | Filesystem Info | Credentials | **Confirmation** | Next > | Finish

Confirmation

Filesystem Info	Credential Info
Filesystem Name: u01	Host Cred Set Name: NC_HOST_ROOT_SPARC
Filesystem Size: 10GB	

FIGURE 21. Add Space to ZFS – Finish

Click **Finish**. The Add Space to ZFS process will execute and a result message will be displayed.

CAT for Oracle

Ensure that you are aware of the implications of running the CAT for Oracle process before starting. This will **ERASE** a target database in a permanent fashion.

The CAT for Oracle process is for executing the tool, not configuring it. Setup needs to be done outside of the OEM plug-in. The plug-in will execute the tool in fullauto mode, so configuration needs to be done to ensure that no manual interaction is required.

Prerequisites: CAT for Oracle must be installed and configured on the plug-in host under the `/opt/oraclecopy` directory to work with the Pure FlashArray plug-in.

Navigate to the **CAT for Oracle** page from the FlashArray menu.

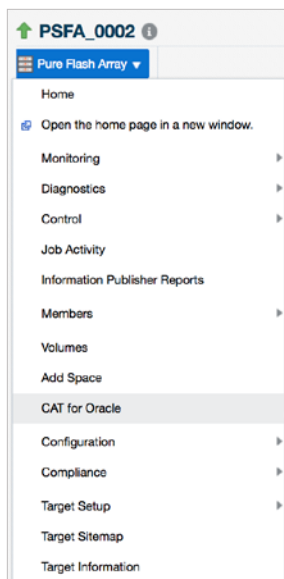


FIGURE 22. CAT for Oracle page

From the **CAT for Oracle** page, select or enter the credentials for the user already setup to execute the CAT for Oracle tool.

PSFA_0002

Pure Flash Array

Execute Oracle CAT Tool

< Back **Credentials** Select Work... Confirmation Next > Cancel

Credentials

☐ Credential
 ☐ Preferred Credential
 ☒ Named Credential
 ☐ New Credential

Credential Name: NC_HOST_ORACLE

Attribute	Value
UserName	oracle
Password	*****

[More Details](#)

FIGURE 23. CAT for Oracle – Credentials

Click **Next** and all of the workflows available on the system will be populated in a drop-down.

PSFA_0002

Pure Flash Array

Execute Oracle CAT Tool

< Back Credentials **Select Work...** Confirmation Next > Cancel

Select Workflow

Select workflow

- src:tgt
- EEP:EEQ

FIGURE 24. CAT for Oracle – Select workflow

Note: if an error appears here or no workflows are available in the dropdown, then CAT for Oracle has not been configured correctly on the plug-in host.

After selecting the workflow, click **Finish** to execute the CAT for Oracle tool in fullauto mode.

PSFA_0002

Pure Flash Array

Execute Oracle CAT Tool

< Back Credentials Select Work... **Confirmation** Next > **Finish**

Confirmation

Workflow Info	Credential Info
Workflow: src:tgt	Host Cred Set Name: NC_HOST_ORACLE

FIGURE 25. CAT for Oracle – Execute

The CAT for Oracle tool will execute and a result message will be displayed.

ASM Reclamation Utility

The ASM Reclamation Utility is a new job that becomes available with the Pure Storage FlashArray plugin. The ASRU consolidates the fragmented data within an ASM disk group to allow for the Pure Storage array to reclaim unused space in the underlying volumes. The Pure Storage FlashArray target must be on the same host as the disk group.

Navigate to **Enterprise**, then **Job**, then **Activity**.

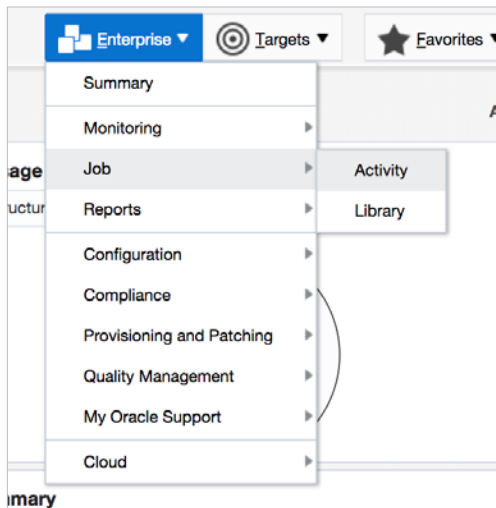


FIGURE 26. Job Activity

Click on **Create Job**.

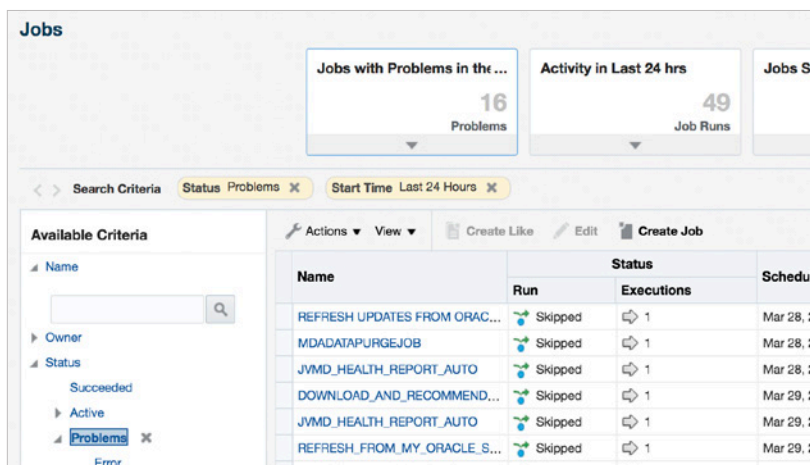


FIGURE 27. Create Job

Select **ASM Reclamation Utility** from the Job List.

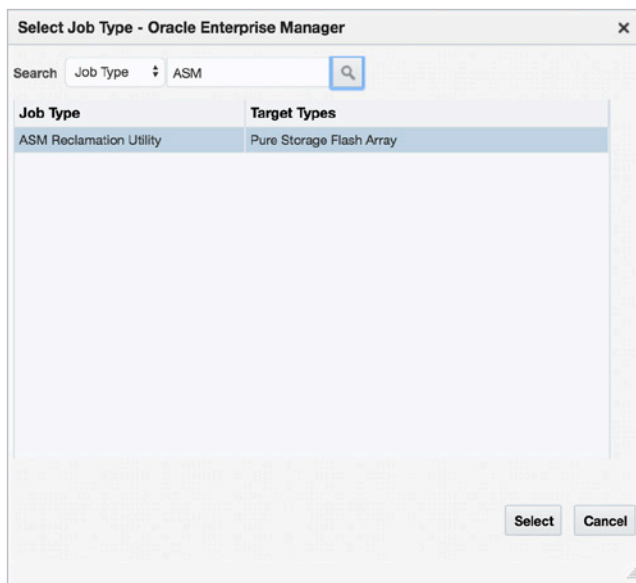


FIGURE 28. ASRU Job

Enter details about the **Job**, including **Name**, and select a **Target**.

FIGURE 29. ASRU Job – Details

Click **Parameters**. Enter the required three parameters:

- **Disk Group** – the ASM disk group from which to reclaim space
- **ASM SID** – the SID of the ASM instance (usually +ASM)
- **Oracle Home** – the Oracle home of the ASM instance, usually the Grid home

Job

Create 'ASM Reclamation Utility' Job

[Cancel](#)
[Save to Library](#)
[Submit](#)

General

Parameters

Credentials

Schedule

Access

* DISK_GROUP

Enter the disk group for space reclamation.

* ASM_SID

Enter the SID for the ASM instance.

* ORACLE_HOME

Enter the ORACLE_HOME for the ASM instance.

Target Properties

Target properties can be used in parameters. Property names are case-sensitive. To escape '%', use '%\%'.

Name	Description
%emd_root%	location of Agent
%perlbin%	location of Perl binary used by Agent
%TargetName%	target name
%TargetType%	target type
%orcl_gtp_contact%	Contact
%orcl_gtp_lifecycle_status%	Lifecycle Status
%orcl_gtp_department%	Department
%orcl_gtp_deployment_type%	Deployment Type
%orcl_gtp_site%	Site
%orcl_gtp_downtime_contact%	Downtime Contact
%orcl_gtp_cs%	Customer Support Identifier
%orcl_gtp_os%	Operating System
%orcl_gtp_line_of_bus%	Line of Business
%orcl_gtp_cost_center%	Cost Center
%orcl_gtp_location%	Location
%orcl_gtp_target_version%	Target Version
%orcl_gtp_platform%	Platform
%orcl_gtp_comment%	Comment
%ARRAY_HOST%	Array Hostname / IP Address
%API_TOKEN%	API Token

[Cancel](#)
[Save to Library](#)
[Submit](#)

FIGURE 30. ASRU Job – Parameters

Select **Credentials**, **Schedule**, and **Access**, if desired. Click **Submit** to start the ASM Reclamation Utility job.

UNDEPLOY THE PLUG-IN

Delete the Pure Storage FlashArray Target

There are two methods of deleting the Pure Storage FlashArray target:

THROUGH THE OEM CONSOLE

1. From the **Target Home** menu, select **Target Setup**, and then **Remove Target**

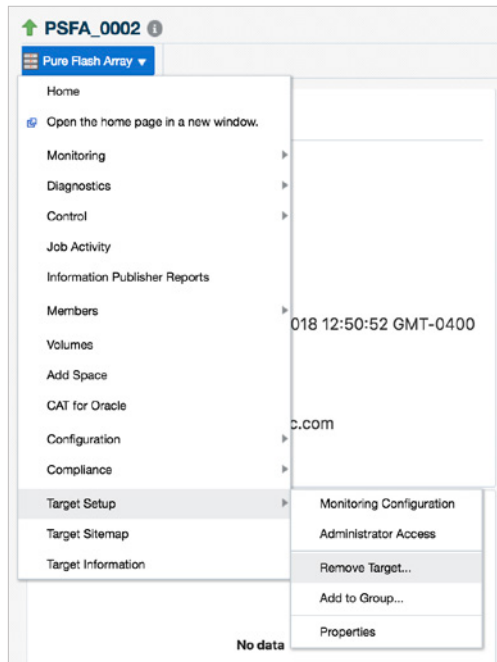


FIGURE 31. Delete Target

2. Select **Ok**.

THROUGH THE EMCLI UTILITY

1. Type the following command:

```
$ emcli delete_target -name="<Target Name>" -type="pure_flash_array"
```
2. The deploy will run in the background after the following output:

```
Target "<Target Name>:pure_flash_array" deleted successfully
```


Undeploy the Plug-in on the Oracle Management Agent (OMA)

Again, there are two methods of undeploying an OMA:

THROUGH THE OEM CONSOLE

To undeploy the plug-in through the console:

1. From the **Setup** menu, select **Extensibility**, and then **Plug-ins**.
2. From the **Plug-ins** page, select the **Pure Storage FlashArray** plug-in. Then select **Undeploy From** and choose **Management Agent**.

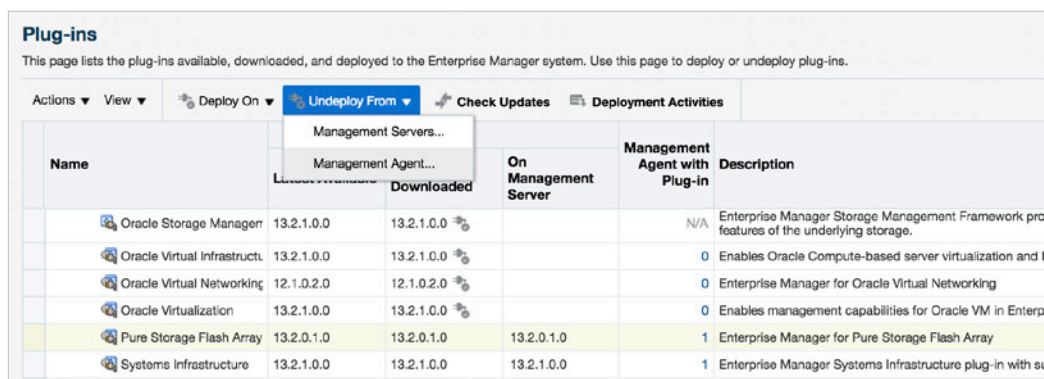

Name	Version	Downloaded	On Management Server	Management Agent with Plug-in	Description
Oracle Storage Manager	13.2.1.0.0	13.2.1.0.0		N/A	Enterprise Manager Storage Management Framework provides features of the underlying storage.
Oracle Virtual Infrastructure	13.2.1.0.0	13.2.1.0.0		0	Enables Oracle Compute-based server virtualization and
Oracle Virtual Networking	12.1.0.2.0	12.1.0.2.0		0	Enterprise Manager for Oracle Virtual Networking
Oracle Virtualization	13.2.1.0.0	13.2.1.0.0		0	Enables management capabilities for Oracle VM in Enterprise
Pure Storage Flash Array	13.2.0.1.0	13.2.0.1.0	13.2.0.1.0	1	Enterprise Manager for Pure Storage Flash Array
Systems Infrastructure	13.2.1.0.0	13.2.1.0.0	13.2.1.0.0	1	Enterprise Manager Systems Infrastructure plug-in with su

FIGURE 32. Undeploy From OMA

3. In the **Undeploy Plug-in from Management Agent** page, select an OMA for undeployment and click **Continue**.
4. In the **Undeploy Plug-in from Management Agent: Pre-requisite Checks** page, verify that the checks were successfully completed and click **Next**.
5. In the **Undeploy Plug-in from Management Agent: Review** page, click **Undeploy** to deploy the plug-in on the OMA.
6. In the **Undeploy Plug-in from Management Agent: Confirmation** page, click **Show Status** to view the steps of the undeployment.
7. In the **Deployment Activities** page, verify that the undeployment was successful with a green checkmark in the **Status** column.

THROUGH THE EMCLI UTILITY

1. Type the following command:

```
$ emcli undeploy_plugin_from_agent -agent_names="<Hostname of agent>:<Port>"  
-plugin=vlss.pure.xvp1:13.2.0.1.0
```
2. The deploy will run in the background after the following output:
Plug-in undeployment from the Management Agents is in progress

Use "emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1" to track the plug-in undeployment status.

3. Verify the deployment is successful by running the status command:

```
$ emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1
```


Undeploy the Plug-in on the Oracle Management Server (OMS)

There are two methods to undeploy from the OMS:

THROUGH THE OEM CONSOLE

To undeploy the plug-in through the console:

1. From the **Setup** menu, select **Extensibility**, and then **Plug-ins**.
2. From the **Plug-ins** page, select the **Pure Storage FlashArray** plug-in. Then select **Undeploy From** and choose **Management Servers**.

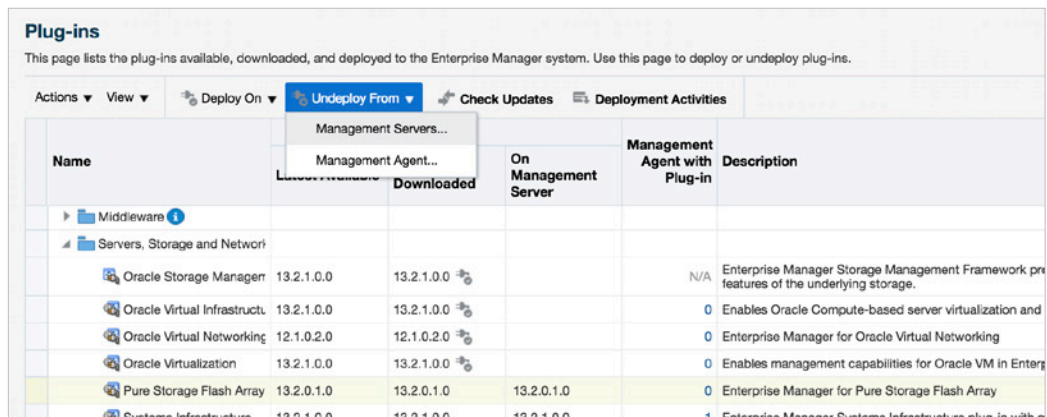

Name	Downloaded	On Management Server	Management Agent with Plug-in	Description
Middleware				
Servers, Storage and Network				
Oracle Storage Manager	13.2.1.0.0	13.2.1.0.0	N/A	Enterprise Manager Storage Management Framework pre-features of the underlying storage.
Oracle Virtual Infrastruct.	13.2.1.0.0	13.2.1.0.0	0	Enables Oracle Compute-based server virtualization and
Oracle Virtual Networking	12.1.0.2.0	12.1.0.2.0	0	Enterprise Manager for Oracle Virtual Networking
Oracle Virtualization	13.2.1.0.0	13.2.1.0.0	0	Enables management capabilities for Oracle VM in Enter
Pure Storage Flash Array	13.2.0.1.0	13.2.0.1.0	0	Enterprise Manager for Pure Storage Flash Array
Customize Infrastructure	13.2.1.0.0	13.2.1.0.0	1	Enterprise Manager Systems Infrastructure plug-in with a

FIGURE 33. Undeploy from OMS

3. In the **Undeploy Plug-in from Management Servers: Plug-ins** page, enter the SYS credentials for the repository or select existing credentials and click **Next**.
4. In the **Undeploy Plug-in from Management Servers: Review** page, click **Undeploy** to undeploy the plug-in from the OMS.
5. In the **Undeploy Plug-in from Management Servers: Confirmation** page, click **Show Status** to view the steps of the deployment.
6. In the **Deployment Activities** page, verify that the undeployment was successful with a green checkmark in the **Status** column.

THROUGH THE EMCLI UTILITY

1. Type the following command:

```
$ emcli undeploy_plugin_from_server -sys_password=<Repository SYS password>
-plugin=vlss.pure.xvp1:13.2.0.1.0
```

2. The deploy will run in the background after the following output:

Undeployment of plug-in from the management servers is in progress

Use " emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1 "

to track plug-in un-deployment status.


3. Verify the deployment is successful by running the status command:

```
$ emcli get_plugin_deployment_status -plugin=vlss.pure.xvp1
```

DELETE PLUG-IN PACKAGE

To delete the plug-in package entirely, you must use the console:

1. From the **Setup** menu, select **Extensibility**, and then **Self-Update**
2. Select **Plug-In**, and select **Pure Storage FlashArray** plug-in. Then select **Delete** from the **Actions** menu.

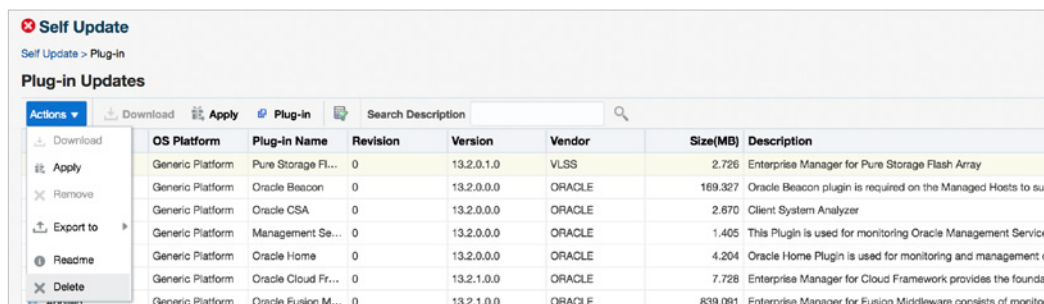

Self Update							
Self Update > Plug-in							
Plug-in Updates							
Actions	Download	Apply	Plug-in	Search Description			
Download	OS Platform	Plug-in Name	Revision	Version	Vendor	Size(MB)	Description
Download	Generic Platform	Pure Storage Fl...	0	13.2.0.1.0	VLSS	2.726	Enterprise Manager for Pure Storage Flash Array
Apply	Generic Platform	Oracle Beacon	0	13.2.0.0.0	ORACLE	169.327	Oracle Beacon plugin is required on the Managed Hosts to su
Remove	Generic Platform	Oracle CSA	0	13.2.0.0.0	ORACLE	2.670	Client System Analyzer
Export to	Generic Platform	Management Se...	0	13.2.0.0.0	ORACLE	1.405	This Plugin is used for monitoring Oracle Management Service
Readme	Generic Platform	Oracle Home	0	13.2.0.0.0	ORACLE	4.204	Oracle Home Plugin is used for monitoring and management c
Delete	Generic Platform	Oracle Cloud Fr...	0	13.2.1.0.0	ORACLE	7.728	Enterprise Manager for Cloud Framework provides the founda
	Generic Platform	Oracle Fusion M...	0	13.2.1.0.0	ORACLE	839.091	Enterprise Manager for Fusion Middleware consists of monito

FIGURE 34. Delete package

TROUBLESHOOTING

Add Space Functionality

*Execution of **Add Space** does not work?*

Do the **agent_name**, the **hostname**, and the host name in Purity all match? If not, the **Add Space** functionality will not work.

Are you running with a privileged account? **root** is generally required to make system level changes.

Log information can be found in `<AGENT_HOME>/agent_inst/sysman/emd/pfa_admin.log`

CAT for Oracle Functionality

*Execution of **CAT for Oracle** does not work?*

Does the tool work from the command line in fullauto mode? Try executing:

```
/opt/oraclecopy/bin/systemcopy -fullauto /opt/oraclecopy/etc/<SRC>_<TGT>.seq
```

Log information can be found in `<AGENT_HOME>/agent_inst/sysman/emd/oracle_cat.log`

© 2018 Pure Storage, Inc. All rights reserved.

Pure Storage and the "P" Logo are trademarks or registered trademarks of Pure Storage, Inc. in the U.S. and other countries. Oracle and Oracle Linux are the registered trademarks of Oracle Corporation in the U.S. and other countries. VLSS is a registered trademark of VLSS LLC in the U.S. and other countries.

The Pure Storage product described in this documentation is distributed under a license agreement and may be used only in accordance with the terms of the agreement. The license agreement restricts its use, copying, distribution, decompilation, and reverse engineering. No part of this documentation may be reproduced in any form by any means without prior written authorization from Pure Storage, Inc. and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. PURE STORAGE SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

ps_wp27p_flasharray-plugin-for-oem_ltr_01